


STEP 1: Match the table to the holes drilled on the seat and screw it from the screw part with 4 holes.

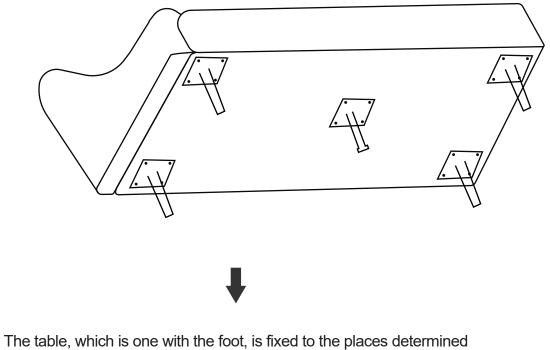

under the seat with the help of a charged drill.